

EM057274925

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Transmitted herewith for filing is the patent application of:

INVENTORSHIP Michell et al.

ATTORNEY'S DOCKET NO. ED7-001

TITLE: Method and Apparatus for Curve Sawing or Traverse Edging with an Active Sawbox

PTO TRANSMITTAL LETTER

To: Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

From: Wells, St. John, Roberts,
Gregory & Matkin P.S.
601 W. First Avenue, Suite 1300
Spokane, WA 99201-3817
Telephone: (509) 624-4276
Fax: (509) 838-3424

Enclosed are:

1. Return Postcard Receipt.
2. PTO Transmittal Letter.
3. 28 pages total Specification, Claims and Abstract pages (Claims 1-21).
4. 7 sheets of informal drawings (Figs. 1-6).
5. Executed Declaration and Power of Attorney.
6. Designation of Domestic Representative.
7. Preliminary Amendment.

Respectfully submitted,

Date:

Sept. 9, 1997

By:

Title: Attorney/Agent for Applicant
John S. Reid
Reg. No.: 36,369

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Priority Application Serial No. 60/019,756
 Priority Filing Date 09/09/96
 Inventor Michell et al.
 Assignee Newnes Machine Ltd.
 Priority Group Art Unit Unknown
 Priority Examiner Unknown
 Attorney's Docket No. ED5-001
 Title: Method and Apparatus for Curve Sawing or Traverse Edging with an Active
 Sawbox

PRELIMINARY AMENDMENT

To: Assistant Commissioner for Patents
 Washington, D.C. 20231

From: John S. Reid (Tel. 509-624-4276; Fax 509-838-3424)
 Wells, St. John, Roberts, Gregory & Matkin P.S.
 601 W. First Avenue, Suite 1300
 Spokane, WA 99201-3817

Please amend the specification as follows: At page 1 following the title and
 before "Field of the Invention," insert:

--CROSS REFERENCE TO RELATED APPLICATION


This application claims priority from U.S. Provisional Application 60/019,756,
 filed September 9, 1996, titled Method and Apparatus for Curve Sawing or Traverse
 Edging with an Active Sawbox.--

REMARKS

This amendment is made in accordance with 37 CFR 1.78(a)(4).

Respectfully submitted,

Dated: Sept. 9, 1997

By: 
 John S. Reid
 Reg. No. 36,369

METHOD AND APPARATUS FOR CURVE SAWING OR TRAVERSE EDGING WITH AN ACTIVE SAWBOX

Field of the Invention

5 This invention relates to a method and an apparatus for curve sawing cants or edging boards or flitches, for lumber, and in particular relates to an active sawbox system, for the curve sawing of cants, or the transverse edging of a board according to an optimized profile for optimum curve sawing of cants, or edging of flitches, with an active sawbox.

Background of the Invention

10 A canted log, or "cant", by definition has first and second opposed cut planar faces. In the prior art, cants were fed linearly through a profiler or gang saw so as to produce at least a third planar face either approximately parallel to the center line of the cant, so called split taper sawing, or approximately parallel to one side of the cant, so called full taper sawing; or at a slope somewhere between split and full taper sawing. For straight cants, using these methods for volume recovery of the lumber can be close to optimal. However, logs often have a curvature and usually a curved log will be cut to a shorter length to minimize the loss of recovery due to this curvature. Consequently, in the prior art, various curve sawing techniques have been used to overcome this problem so that longer length lumber with higher grade recovery may be achieved.

20 Curve sawing typically uses a mechanical centering system that guides a cant into a secondary break-down machine with chipping heads or saws. This centering action results in the cant following a path very closely parallel to the center line of the cant, thus resulting in split taper chipping or sawing of the cant. Cants that are curve sawn by this technique generally produce longer, wider and stronger boards than is typically possible with a straight sawing technique where the cant has significant curvature.

Curve sawing techniques have also been applied to cut parallel to a curved face of a cant, i.e. full taper sawing. See for example Kenyan, United States Patent No. 4,373,563 and Lundstrom, Canadian Patent No. 2,022,857. Both the Kenyan and Lundstrom devices use mechanical means to center the cant during curve sawing and thus disparities on the surface of the cant such as scars, knots, branch stubs and the like tend to disturb the machining operation and produce a "wave" in the cant. Also, cants subjected to these curve sawing techniques tend to have straight sections on each end of the cant. This results from the need to center the cant on more than one location through the machine. That is, when starting the cut, the cant is centered by two or more centering assemblies until the cant engages anvils behind the chipping heads. When the cant has progressed to the point that the centering assemblies in front of the machine are no longer in contact, the cant is pulled through the remainder of the cut in a straight line. It has also been found that full taper curve sawing techniques, because the cut follows a line approximately parallel to the convex or concave surface of the cant, can only produce lumber that mimics these surfaces, and the shape produced may be unacceptably bowed.

Thus in the prior art, so called arc-sawing was developed. See for example United States Patent Nos. 5,148,847 and 5,320,153. Arc sawing was developed to saw irregular swept cants in a radial arc. The technique employs an electronic evaluation and control unit to determine the best semi-circular arc solution to machine the cant, based, in part, on the cant profile information. Arc sawing techniques solve the mechanical centering problems encountered with curve sawing but limit the recovery possible from a cant by constraining the cut solution to a radial form.

Applicant is aware of attempts in the prior art to curve sawing by pivoting or skewing the gangsaw, and in particular, United States Patent No. 4,599,929 which issued to Dutina. Dutina teaches curve sawing where each saw guide and/or saw axle is adjusted in view

of the average inclination over the sawing line of the entire longitudinal profile of the workpiece or of parts of the longitudinal profile.

Applicant is also aware of United States Patent No. 4,373,563, United States Patent No. 4,572,256, United States Patent No. 4,881,584, United States Patent No. 5,320,153, United States Patent No. 5,400,842 and United States Patent No. 5,469,904, which all relate to the curve sawing of two-sided cants.

It has been found that optimized lumber recovery is best obtained for most if not all cants if a unique cutting solution is determined for every cant. Thus for each cant a "best" curve is determined, which in some instances is merely a straight line parallel to the center line of the cant, and in other instances a complex curve that is only vaguely related to the physical surfaces of the cant.

Thus it is an object of the present invention to improve recovery of lumber from cants and in particular irregular or crooked cants by employing a "best" curve and a unique cutting solution for each cant. To achieve this objective a two-sided cant is positioned and accurately driven straight into an active curve sawing gang, to produce the "best" curve which includes smoothing technology.

A board, or "flitch", by definition has first and second opposed cut planar faces and first and second opposed waned edges. In one prior art method, flitches would be scanned and sequenced horizontally then positioned in the desired skew, if any, and then clamped by feed rolls to be fed linearly into a conventional edger. In a second prior art method, flitches would be centered in the direction of flow and then translated through a linear scanner and, in the same direction, into a conventional edger. The first approach is effective, but the system is quite expensive and the positioning of the flitch takes extra time. The second approach works for

uniform straight flitches, but causes a loss of recovery when the flitches are crooked or flared on one side.

5 Different methods of lineal scanning and positioning have been proposed. United States Patent No. 4,239,072 (Meriläinen) discloses a lineal scanning and skew edging process. It lacks the ability to produce high quality chips at higher feed speeds and does not allow for multiple saws. United States Patent No. 4,449,557 (Mäkelä) discloses a similar process, but without the ability to reduce the edgings to chips. It also does not allow for multiple saws.

10 United States Patent No. 5,429,161 (Allard) discloses a linear scanning edger process. The apparatus positions the flitch while the flitch is moving, with two pairs of tandem (top and bottom) clamp rollers that skew the flitch as it is moving up to the edger. This process relies on the twisting of the flitch as it moves through the roller clamps, which causes skidding of the flitch between the rollers as they are skewed. The variance in friction between different flitches and the rollers and the difference in the direction of the rollers' axis and the direction of the flitch as it travels through the roller clamps, can cause a margin of error that reduces the recovery percentage.

15 20 25 It has been found that optimized lumber recovery is more easily obtained by merely roughly, that is, non-accurately, placing the flitch or other workpiece on a conveyor, then conveying the flitch or workpiece through a lineal scanner, and straight through an edger where, instead of positioning the flitch, the saws and chip heads adjust and then traverse, to saw and chip the flitch. Because chip heads replace the outer saws, the need to handle the edgings after they exit the edger is eliminated. This eliminates a "tailer" which is normally used to separate the edgings and also the need for extra conveyors to transport the edgings.

The present invention skews the saws and guides about a vertical axis perpendicular to the flow by skewing the sawbox and translates the saws and guides transversely

to the flow within the sawbox, that is, relative to the sawbox, to accomplish active curve sawing of a workpiece.

5 It is an object of the present invention to improve the efficiency of lumber production from workpieces, and in particular from irregular or crooked workpieces. A workpiece moves straight in the direction of flow through the curve sawing sawbox, where the saws and/or chip heads skew and actively translate in unison to saw and/or chip the flitch.

10 It is a further object of the present invention to improve the efficiency of the lumber production from flitches and in particular for irregular or crooked flitches, by employing scanning and a traversing edger which follows the cutting solution for each flitch as is determined by the optimizer from the scanned profile of the flitch and the desired lumber sizes. This objective is achieved by not positioning the flitch with extra machinery, but rather to place the flitch approximately correctly positioned and then feed the flitch through a scanner and then into an
15 edger, adjusting the skew and then actively traversing the edger, to produce the desired recovery percentage.

20 It is also an object of the present invention to provide: (a) a sawbox capable of variable lumber target sizes, that allows the setting of different saw blade spacings thereby reducing the number of saw blades needed in mills where lumber widths vary, (b) a sawbox of reduced weight and size capable of larger sawing zones, (c) a sawbox requiring less travel because of its increased sawing zone capability, and, (d) a sawbox having a reduced response time.

25 It is another object of the present invention to eliminate, by the use of chip heads within the active curve sawing edger, the need to handle edgings behind the sawbox and at the same time improving the chip quality produced from the edgings.

Summary of the Invention

The apparatus of the present invention is capable of both curve sawing cants, or traverse edging of flitches, more efficiently, and to optimize recovery, based on the measured cant or flitch shape, lumber value, operator input and mill requisites.

An unscrambler receives and separates the workpiece from the mill and then feeds single workpieces onto an even ending roll case having a live fence. The ending rolls even end the workpieces against the live fence, and then transfer the workpieces to a sequencing transfer. The sequencing transfer gathers, advances and holds the workpieces for timed release, to queue the workpiece for release onto an angled roll case, or other translation means, which roughly positions the workpieces against a fence, also known as a line bar. The angled roll case feeds workpieces singly on to a wide circulating belt, which moves each workpiece through a scanner, where the scanner reads the profile of each workpiece and sends the data to a decision processor system. It is to be understood that it is within the scope of the present invention that scanning may be done at any point upstream of the active sawbox.

If the mill area does not allow for a lineal scanning layout, that is, the mill does not have the physical area for a lineal scan system, a transverse scanner may be employed.

An optimizing algorithm in the decision processor generates a three dimensional model from the workpiece measurements and calculates the cutting solution. Data is then transmitted to a programmable logic controller (PLC) that in turn sends motion control information related to the optimum breakdown solution to an active sawbox to control the position and the movement of the saws.

The workpiece moves from the scanner along the belt and up to a sharpchain positioned just in front of the active sawbox, where overhead driven press rolls above the

sharpchain press down on the workpiece and feed the workpiece straight into the active sawbox. The saws thus follow an optimum path for the workpiece to produce the desired recovery.

5 In an alternative embodiment, chip heads may replace the outer saws on the saw arbor in the sawbox to reduce the outer slabs or edgings of the workpiece into chips. These chip heads may, although are not required to, have internal reduction planetary gears that allow the chip heads to rotate at a lower speed than the saws, as the chip heads are mounted on the same arbor as the saws. The planetary gear diameters are set so to allow an optimum speed of the chipping heads, to help create quality chips.

10 The active sawbox apparatus uses a plurality of overhead pressrolls, with an underside circulating sharpchain in the infeed area. The infeed area may also have fixed split bedrolls. The outfeed area may also have non-split bedrolls and a plurality of overhead pressrolls. The workpiece is pressed from the top by the overhead pressrolls onto the lower infeed sharpchain and bedrolls for feeding the workpiece straight into the sawbox. The saws adjust for desired cut width. The saw spacing is then fixed. The sawbox actively skews, while the arbor, with saws and guides, actively translate in unison so as to create the optimum lumber and thus optimum recovery percentage from the workpiece. The workpiece translates through the sawbox straight, in the direction it was scanned. Thus, in curve sawing the workpiece, the sawbox skews and translates to follow an optimum curve as the workpiece passes straight through the sawbox apparatus, where the optimum curve has been decided by the optimizer from the scanned image of the workpiece.

20 In the sawbox apparatus, when edging, the saws adjust for width and skew, and then position for starting. They then translate in unison as needed, thus cutting along the edge path that has been determined by the optimizer, as the workpiece passes.

Saw guide pairs are held together by clamping means and are connected to the saw shifting block by a removable means which allows the saw guides to be lifted up over the saw blades, after the clamping means is released.

5 When using chip heads in place of the outer saws on the saw arbor, may be an adjustable anvil (adjustable to the thickness of the workpiece) is positioned over the workpiece and closely adjacent the chip heads. The anvil gives the chipping action a shear point, thus assisting in producing a clean edge on the workpiece. The chip heads may be drum-like with angled cutting knives that slice rather than chop the slabs or edgings, thus producing better chip
10 quality.

In summary, the selectively adjustable edging and curve-sawing saw of the present invention comprises:

15 a selectively skewable sawbox, skewable in a generally horizontal plane about a vertical axis of rotation relative to an infeed path and positionable in the infeed path so as to receive workpieces translated generally longitudinally along the infeed path and into the sawbox,

20 the sawbox rotatably supporting, on a selectively rotatable generally horizontal saw arbor selectively rotatable about a generally laterally extending horizontal axis of rotation, a plurality of generally vertically and longitudinally aligned saw blades in parallel selectively adjustable laterally spaced array,

25 saw blade array spacing selective adjustment means mounted to the sawbox for selective adjustment of lateral spacing between the saw blades in the parallel selectively adjustable laterally spaced array along the saw arbor,

saw translating means for laterally translating the parallel selectively adjustable laterally spaced array relative to the sawbox according to an optimized profile.

In a first aspect of the present invention, where the saws move relative to the saw arbor by sliding along the splines of the saw arbor, the saw blade array spacing selective adjustment means and the saw translating means are selectively positionable laterally translatable parallel rigid members, in the preferred embodiment Y axis positioning cylinders and shafts, extending and translatable generally parallel to the saw arbor. The translatable parallel rigid members are rigidly mounted to saw blade guide means for selective slidable lateral positioning of the saw blades along the saw arbor. Selective lateral positioning of each of the translatable parallel rigid members selectively laterally positions one corresponding saw blade along the saw arbor by one-to-one coupling via a corresponding saw blade guide mounted to a corresponding translatable parallel rigid member.

In a second aspect, where the saw arbor is selectively clamped to all of the rigid members, that is, the Y axis positioning shafts, the saw blade array spacing selective adjustment means are, as above, selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to the saw arbor. The translatable parallel rigid members are rigidly mounted to corresponding saw blade guide means or guides for selective slidable lateral positioning of the saw blades along the saw arbor. The selective lateral positioning of each of the translatable parallel rigid members selectively laterally positions one corresponding saw blade, whereby lateral spacing between the saw blades may be adjusted prior to lateral translation of the laterally spaced array of said saw blades. The saw translating means is selectively actuatable clamping means:

- (a) selectively actuatable to selectively rigidly couple a first translatable parallel rigid member of the translatable parallel rigid members to the translatable parallel rigid members other than the first translatable parallel rigid

member (hereinafter the remaining translatable parallel rigid members) when the remaining translatable parallel rigid members are free floating by activation of free floating means, such as de-activating the flutter valves on the actuators, cooperating with the translatable parallel rigid members, and

- (b) coupling the first translatable parallel rigid member to the saw arbor so as to rigidly couple the first translatable parallel rigid member to the saw arbor in a transverse direction along the horizontal axis of rotation and so as to rotatably couple the first translatable parallel rigid member to the saw arbor about the horizontal axis of rotation.

The first translatable parallel rigid member is selectively actuably positionable when the remaining translatable parallel rigid members are free floating. Thus, selective positioning of the first translatable parallel rigid member according to the optimized profile translates the laterally spaced array of the saw blades according to the optimized profile as the workpiece is translated along the feedpath and through the sawbox.

In a third aspect, where the saw blades are slidably mounted on a sleeve, and the sleeve slidably mounted on the saw arbor, and the sleeve clamped to one of the Y axis positioning shafts, the array of saw blades are splined and slidably mounted on a correspondingly externally splined sleeve. The sleeve is internally splined and slidably mounted on external splines on the saw arbor. Again, the saw blade array spacing selective adjustment means are selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to the saw arbor, the rigid members rigidly mounted to corresponding saw blade guide means for selective slidable lateral positioning of the saw blades along the sleeve. Selective lateral positioning of each of the rigid members selectively laterally positions one corresponding saw blade along the sleeve by one-to-one coupling via a corresponding saw blade guide. The saw translating means are the translatable parallel rigid members rigidly mounted to the saw blade

guide means. At least a first translatable parallel rigid member is clamped, by clamping means, to the sleeve so as to selectively translate the sleeve relative to the saw arbor in unison with the first translatable parallel rigid member.

5 In a fourth aspect, where the saw blades are slidably mounted on a sleeve, and the sleeve slidably mounted on the saw arbor, and the saw arbor selectively clamped to all of the Y axis positioning shafts, at least a first translatable parallel rigid member is selectively actuatable and positionable, and the remaining translatable parallel rigid members are adapted to be selectively free floating when selectively actuatable clamping means are selectively actuated to rigidly secure
10 the remaining translatable parallel rigid members to the first translatable parallel rigid member and to the sleeve so as to selectively translate the sleeve relative to the saw arbor in unison with the first translatable parallel rigid member.

15 In a fifth aspect, where the saw arbor is clamped to one of the Y axis positioning shafts, at least a first translatable parallel rigid member is clamped, by clamping means, to the saw arbor so as to selectively translate the saw arbor in unison with the first translatable parallel rigid member.

20 Advantageously, in all embodiments, the selectively actuatable clamping means is a tie bar rigidly coupled either to the saw arbor, or the sleeve, in a transverse direction along the horizontal axis of rotation, depending on whether the saw arbor or the sleeve is laterally translating. The tie bar is rotatably coupled to the saw arbor or sleeve about the horizontal axis of rotation.

25 Where the tie bar extends across all of the translatable parallel rigid members, the tie bar includes selectively actuatable clamps for rigidly coupling the remaining translatable parallel rigid members to the first translatable parallel rigid member when the remaining translatable parallel rigid members are free floating, that is, following active pre-positioning of the saw blades.

The clamps clamp the remaining Y axis positioning shafts to thus physically couple the free floating Y axis positioning shafts to the first, active, Y axis positioning shaft governing active lateral translation for curve sawing or edging.

5 The Y axis positioning shafts may remain actively independently translatable following prepositioning of the saw blades so that each Y axis positioning cylinder actively governs the cutting path of its corresponding saw blade. In those embodiments, the tie bar only extends from the saw arbor or sleeve to the first Y axis positioning shaft.

10 Further advantageously, the end blades at either end of the array of saw blades may be chipping heads. The array may consist of two or more blades. The chipping heads may, although not necessarily, be coupled by reduction gearing to the saw arbor for optimal rotational speed. The chipping heads chip in chipping planes parallel to the saw blades so as to chip a workpiece translating generally longitudinally into the sawbox for curve sawing and edging. The
15 chipping heads are in line with the saw arbor.

20 The sawbox may, further, include chipping anvils corresponding to, and cooperating with the chipping heads. The chipping anvils are mounted in close adjacency to arcs of rotation of the chipping blades in the chipping planes, so as to lie at least partially in the chipping planes, to provide a bearing and shearing surface against which a workpiece may bear so as to shear chips from the workpiece as the chipping blades engage the workpiece in the chip cutting engagement. The chipping anvils may be rigid members having generally planar bearing surfaces extending generally horizontally, parallel to the saw arbor, and the chipping blades, as they rotate in the arcs of rotation, to form an acute angle relative to the planar bearing surfaces as
25 the chipping blades are rotated past the chipping anvils.

The reduction gears may be planetary reduction gears, for reducing the rate of rotation of the chipping heads relative to the rate of rotation of the saw blades so as to optimize cutting of the chips from the workpiece.

5 The invention provides other advantages which will be made clear in the description of the preferred embodiments.

Brief Description of the Drawings

10 The invention will be better understood by reference to drawings, wherein:

Figure 1 is a plan view showing the active sawbox system of the present invention.

15 Figure 2 is a side elevation cross-sectional view according to a preferred embodiment of the invention, along section line 2-2 in Figures 1 and 4.

Figure 3 is an end elevation cross-sectional view according to a preferred embodiment of the invention, along section line 3-3 in Figures 1 and 4.

20 Figure 3a is an end elevation cross-sectional view according to an alternative preferred embodiment of the present invention.

Figure 4 is an enlarged section plan view, taken from Figure 1.

25 Figure 5 is a side section view of chip head of an alternative embodiment of the present invention.

Figure 5a is an end section view of the chip head of Figure 5 along sectional line 5a-5a.

Figure 6 is a diagrammatic view of the overall mill system incorporating the present invention.

Detailed Description of Preferred Embodiments

Referring to the drawing figures wherein similar characters of reference represent corresponding parts in each view, the active sawbox apparatus of the present invention is generally indicated by the reference numeral 10.

As seen in Figure 1, an unscrambler 12 receives the workpiece 14 from the mill (direction A) and separates the workpiece 14 and then feeds the workpiece 14 onto an even ending roll case 16 which ends the workpiece 14 onto live fence 16a, and then transfers the workpiece 14 on to a sequencing transfer 18, or a drop out 20. Dropout 20 allows the operator to reject a workpiece before it moves on to the sequencing transfer 18. Sequencing transfer 18 includes ducker A22, where workpiece 14 is sent from ducker A22 to ducker B24 when ducker B24 becomes available. Sequencing transfer 18, includes ducker C26, where workpiece 14 is sent to ducker C26 from ducker B24 when ducker C26 becomes available. Sequencing transfer 18, includes ducker D28, where workpiece 14 is sent to ducker D28 from ducker C26 when ducker D28 becomes available. Sequencing transfer 18, includes ducker E30, where workpiece 14 is sent to ducker E30 from ducker D28 when ducker E30 becomes available.

Angled rollcase 32 receives workpiece 14 from ducker E30 when angled rollcase 32 becomes available. As also seen in Figure 6, angled rollcase 32 moves workpiece 14 up to a fence 34, where, once workpiece 14 contacts fence 34, the angled rollcase 32 begins to move workpiece 14 in direction B. Workpiece 14 moves along angled rollcase 32 and fence 34, and

then onto a wide belt 36 which continues to move workpiece 14 in direction B. Workpiece 14 continues to move in direction B through lineal scanner 38, where the lineal scanner 38 obtains an image of workpiece 14.

5 As best seen in Figures 2 and 4, a plurality of driven pressrolls 40, actuated by pressroll cylinders 40a, receive workpiece 14 prior to entering sawbox apparatus 10. Pressrolls 40 press down to hold workpiece 14 against sharpchain 42 and split bedrolls 44. Driven pressrolls 40 and sharpchain 42 drive workpiece 14 in a straight line in direction B into sawbox apparatus 10.

10 The image of workpiece 14 from scanner 38 is sent to an optimizer decision processor 46, where the image is processed. The processed decision information is exported to sawbox apparatus 10 where sawbox apparatus controllers (not shown) activate X axis positioning cylinder 46 and Y axis positioning cylinders 56a, 56b, 56c and 56d which may be Temposonic (TM) cylinders, seen in Figures 3 and 4.

15 In a first preferred embodiment, seen in Figures 3 and 4, once the Y axis positioning cylinders have been positioned for the desired lumber target size, thereafter they are actuated in unison with saw arbor 52 so that the Y axis positioning cylinder shafts, the saw arbor, the saw guides, and the saw blades are translated laterally and actively according to the optimized cutting and edging profile.

20 Once Y axis positioning cylinders 56a, 56b, 56c and 56d, are actuated to position saws 50 and saw guides 54 for desired width of cut, tie bar 58 is actuated by means of tie bar clamp cylinders 62 to clamp, that is, to restrain, further independent movement of Y axis positioning cylinder shafts 60b, 60c and 60d relative to shaft 60a. Y axis positioning cylinders 56b, 56c and 56d are released to "float" once tie bar 58 clamps Y axis positioning cylinder shafts

60b, 60c and 60d. Y axis positioning cylinder shaft 60a is fixed to tie bar 58 by means of bolt 58b. Tie bar 58 is rotatably mounted to arbor 52, by thrust bearing 58a.

5 Once saws 50 are positioned, Y axis positioning cylinder 56a is actuated to move saw guides 54, saw guides blocks 54a, arbor 52, tie bar 58, and saws 50, so as to translate saws 50 in unison in direction D within sawbox 10 while sawbox 10 skews in direction E on X axis pin 64 by means of X axis positioning cylinder 46. Arbor 52 has raised splines 52a. Splines 52a slidingly journal in correspondingly splined saws 50. Arbor 52 rotatably slides in bearings 52b and 52c. Arbor 52 and saws 50 translate in direction D. Splined slip joint 66 at the end of arbor 10 52, near U-joint 70, allows motors 72 to remain stationary as arbor 52 and saws 50 actively skew and translate to follow the optimized path. Translation of arbor 52 and saws 50, rather than translation of the entire sawbox 10 reduces the moving weight of sawbox 10 and thereby reduces the response time of the sawbox when following the optimized cutting or edging profile of workpiece 14.

15 In a second preferred embodiment, arbor 52 is not fixed to Y axis positioning cylinder shaft 60a, but rather, saws 50 are moved relative to arbor 52 by Y axis positioning cylinders 56a, 56b, 56c and 56d, acting in unison to slide saws 50 over splines 52a. Thus, in this embodiment, tie bar 58, tie bar clamp cylinders 62, and splined slip joint 66 are not required.

20 In a third preferred embodiment, arbor 52 is fixed to Y axis positioning cylinder shaft 60a by a short tie bar 58', such as seen in Figure 3a. Short tie bar 58' does not extend over Y axis positioning shafts 60b, 60c and 60d. Thus, shafts 60b, 60c and 60d cannot be clamped to shaft 60a and translating saws 50 in unison requires continuous active control of all Y axis 25 positioning cylinders.

Use of tie bar 58, which only requires active control of one Y axis positioning cylinder, the remaining cylinders being free floating and tied to the translation of the active cylinder, thus simplifies the required system controls when in operation.

5 In a fourth preferred embodiment depicted in Figure 3a, again, arbor 52 is not free to translate laterally. However, in this embodiment, rather than saws 50 sliding relative to arbor 52 in splines directly on arbor 52, a sleeve 53 is splined between saws 50 and arbor 52. Thus, sleeve 53 is free to be laterally positioned relative to arbor 52, being splined thereon by means of internal splines (not shown) slidably mated onto arbor splines 52a. Saws 50 are to be laterally
10 slid relative to sleeve 53, saws 50 being slidably mated onto splines 53a.

Thus the target lumber sizes may be preset by selective actuation of Y axis positioning cylinders 56a-56d. Once saws 50 have been prepositioned, active curve sawing and edging is accomplished by translating saws 50 in unison on sleeve 53 as sawbox 10 is actively skewed. In this preferred embodiment, tie bar 58' is fixed to Y axis positioning cylinder shaft 60a and rotatably mounted at its other end by means of thrust bearing 58a to sleeve 53. Thus, sleeve 53 and the saw guide 54 mounted to cylinder shaft 60a are physically coupled. In an alternative
15 embodiment, short tie bar 58' may be replaced by a tie bar 58 having actuatable clamps 62.

20 Seen in Figure 5, chip heads 74 may replace the outer-most of saws 50. Chip heads 74 reduce the slabs or edgings from workpiece 14 into chips as workpiece 14 moves through active sawbox apparatus 10. Chip heads 74 may have internal planetary reduction gears 76 that allow the chip heads to rotate in direction F at an optimum speed, to create quality chips (not shown). Chipping anvils 78 provide shear points for the chipping heads in the production of chips.

25 As illustrated in Figure 6, optimizer decision processor 46 and the scanner 38 communicate on a common scanner local area network 80. An ethernet (TM) local area network (LAN) 82, and a network server 84 provide network communications. Modem 86 provides

external communications. Man-machine interface 86 and primary workstation 90 also communicate over the ethernet (TM) LAN 82.

5 The optimizer decision processor 46 and associated network server 84, man-machine interface 88, programmable logic controller (PLC) 92 and primary work station 90 communicate across a common ethernet (TM) LAN 82, which is available as a connection point to existing mill networks. This connection point allows workstations within the existing mill offices (with appropriate software) access to all workpiece optimization functions. A dedicated communications link 94 may exist between the optimizer decision processor 46 and the
10 programmable logic controller (PLC) 92. All workstations and the network server 84 contain software applications which provide mill personnel the tools they require to define their environment (scanner, optimizer, machine center, products, shift schedules, reports) to the workpiece optimizer system; pre-generate various start-up configurations; start, stop and load the system; visually monitor the workpiece 14 as it proceeds through the system; and monitor the operation for unusual conditions. The operators console 96 allows the operator to stop the
15 movement of workpiece 14 or divert a workpiece through dropout 20.

20 Modern 86 attached to the network server 84, and the primary workstation 90 using remote access software and appropriate controls, allows remote dial-up access to the mill site for software reprogramming and remote operation of almost every application and function as well as retrieval of statistics and workpiece summaries for off-site service analysis. The man-machine interface 88 provides operator input and allows the operator access to various levels of machine operation and control. The PLC 92 and motion controllers 98, share the task of monitoring speed and position of the workpiece 14 and controlling positioners.

25 As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the practice of this invention

without departing from the spirit or scope thereof. Accordingly, the scope of the invention is to be construed in accordance with the substance defined by the following claims.

255060-0625580

WHAT IS CLAIMED IS:

1. A selectively adjustable edging and curve-sawing saw comprising:

5 a selectively skewable sawbox, skewable in a generally horizontal plane about a vertical axis of rotation relative to an infixed path and positionable in said infixed path so as to receive a workpiece translated generally longitudinally along said infixed path and into said sawbox,

10 said sawbox rotatably supporting, on a selectively rotatable generally horizontal saw arbor selectively rotatable about a generally laterally extending horizontal axis of rotation, a plurality of generally vertically and longitudinally aligned saw blades in parallel selectively adjustable laterally spaced array,

15 saw blade array spacing selective adjustment means mounted to said sawbox for selective adjustment of lateral spacing between said saw blades in said parallel selectively adjustable laterally spaced array along said saw arbor,

20 saw translating means for laterally translating said parallel selectively adjustable laterally spaced array relative to said sawbox according to an optimized profile.

2. The saw of claim 1 wherein said saw blade array spacing selective adjustment means and said saw translating means are selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to said saw arbor, said translatable parallel rigid members rigidly mounted to saw blade guide means for selective slidable lateral positioning of said saw blades along said saw arbor, wherein selective lateral positioning of each of said translatable parallel rigid members selectively laterally positions one corresponding saw blade of said saw blades.
- 25

3. The saw of claim 1 wherein said saw blade array spacing selective adjustment means are selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to said saw arbor, said translatable parallel rigid members rigidly mounted to corresponding saw blade guide means for selective slidable lateral positioning of said saw blades along said saw arbor, wherein selective lateral positioning of each of said translatable parallel rigid members selectively laterally positions one corresponding saw blade of said saw blades, whereby lateral spacing between said saw blades may be adjusted prior to lateral translation of said laterally spaced array of said saw blades,

and wherein said saw translating means is selectively actuatable clamping means:

- (a) selectively actuatable to selectively rigidly couple a first translatable parallel rigid member of said translatable parallel rigid members to said translatable parallel rigid members other than said first translatable parallel rigid member when said translatable parallel rigid members other than said first translatable parallel rigid member are free floating by activation of free floating means cooperating with said translatable parallel rigid members, and
- (b) coupling said first translatable parallel rigid member to said saw arbor so as to rigidly couple said first translatable parallel rigid member to said saw arbor in a transverse direction along said horizontal axis of rotation and so as to rotatably couple said first translatable parallel rigid member to said saw arbor about said horizontal axis of rotation,

wherein said first translatable parallel rigid member is selectively actuably positionable when said translatable parallel rigid members other than said first translatable parallel rigid members are free floating, whereby selective positioning of said first translatable parallel

rigid member according to said optimized profile translates said laterally spaced array of said saw blades according to said optimized profile as said workpiece is translated along said feedpath and through said sawbox.

- 5 4. The saw of claim 1 wherein said saw blades are splined and slidingly mounted on a correspondingly externally splined sleeve, and wherein said sleeve is internally splined and slidingly mounted on external splines on said saw arbor,

10 and wherein said saw blade array spacing selective adjustment means are selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to said saw arbor, said translatable parallel rigid members rigidly mounted to corresponding saw blade guide means for selective slidable lateral positioning of said saw blades along said sleeve, wherein selective lateral positioning of each of said translatable parallel rigid members selectively laterally positions one corresponding saw blade of said saw blades, whereby lateral spacing between said saw blades may be adjusted prior to lateral translation of said laterally spaced array of said saw blades,

15 and wherein said saw translating means are said translatable parallel rigid members rigidly mounted to said saw blade guide means wherein a first translatable parallel rigid member of said translatable parallel rigid members is clamped, by clamping means, to said sleeve so as to selectively translate said sleeve relative to said saw arbor in unison with said first translatable parallel rigid member.

- 20 5. The saw of claim 1 wherein said array of saw blades are splined and slidingly mounted on a correspondingly externally splined sleeve, and wherein said sleeve is internally splined and slidingly mounted on external splines on said saw arbor,
- 25

and wherein said saw blade array spacing selective adjustment means are selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to said saw arbor, said translatable parallel rigid members rigidly mounted to corresponding saw blade guide means for selective slidable lateral positioning of said saw blades along said sleeve, wherein selective lateral positioning of each of said translatable parallel rigid members selectively laterally positions one corresponding saw blade of said saw blades, whereby lateral spacing between said saw blades may be adjusted prior to lateral translation of said laterally spaced array of said saw blades,

and wherein said saw translating means is selectively actuatable clamping means:

- (a) selectively actuatable to selectively rigidly couple a first translatable parallel rigid member of said translatable parallel rigid members to said translatable parallel rigid members other than said first translatable parallel rigid member when said translatable parallel rigid members other than said first translatable parallel rigid member are free floating by activation of free floating means cooperating with said translatable parallel rigid members, and
- (b) coupling said first translatable parallel rigid member to said sleeve so as to rigidly couple said first translatable parallel rigid member to said sleeve in a transverse direction along said horizontal axis of rotation and so as to rotatably couple said first translatable parallel rigid member to said sleeve about said horizontal axis of rotation,

wherein said first translatable parallel rigid member is selectively actuatably positionable so as to selectively translate said sleeve relative to said saw arbor in unison with said first translatable parallel rigid member when said translatable parallel rigid members other than said first translatable parallel rigid members are free floating, whereby selective

positioning of said first translatable parallel rigid member according to said optimized profile translates said laterally spaced array of said saw blades according to said optimized profile as said workpiece is translated along said feedpath and through said sawbox.

- 5 6. The saw of claim 3 wherein said selectively actuatable clamping means is a tie bar.
7. The saw of claim 4 wherein said selectively actuatable clamping means is a tie bar rigidly coupled to said sleeve in a transverse direction along said horizontal axis of rotation and rotatably coupled to said sleeve about said horizontal axis of rotation.
- 10 8. The saw of claim 5 wherein said selectively actuatable clamping means is a tie bar.
9. The saw of claim 6 wherein said tie bar extends across all of said translatable parallel rigid members and wherein said tie bar includes selectively actuatable clamps, each clamp of said selectively actuatable clamps corresponding to a single translatable parallel rigid member of said translatable parallel rigid members other than said first translatable parallel rigid member.
- 15 10. The saw of claim 8 wherein said tie bar extends across all of said translatable parallel rigid members and wherein said tie bar includes selectively actuatable clamps, each clamp of said selectively actuatable clamps corresponding to a single translatable parallel rigid member of said translatable parallel rigid members other than said first translatable parallel rigid member.
- 20 11. The saw of claim 7 wherein said tie bar only extends from said sleeve to said first translatable parallel rigid member.
- 25

12. The saw of claim 1 wherein said saw blade array spacing selective adjustment means are selectively positionable laterally translatable parallel rigid members extending and translatable generally parallel to said saw arbor, said translatable parallel rigid members rigidly mounted to corresponding saw blade guide means for selective slidable lateral positioning of said saw blades along said saw arbor, wherein selective lateral positioning of each of said rigid members selectively laterally positions one corresponding saw blade of said saw blades, whereby lateral spacing between said saw blades may be adjusted prior to lateral translation of said laterally spaced array of said saw blades,

and wherein said saw translating means are said translatable parallel rigid members rigidly mounted to said saw blade guide means wherein a first translatable parallel rigid member of said translatable parallel rigid members is clamped, by clamping means, to said saw arbor so as to selectively translate said saw arbor in unison with said first translatable parallel rigid member.

13. The saw of claim 12 wherein said selectively actuatable clamping means is a tie bar, extending from said saw arbor to said first translatable parallel rigid member, rigidly coupled to said saw arbor in a transverse direction along said horizontal axis of rotation and rotatably coupled to said saw arbor about said horizontal axis of rotation.

14. The saw of claim 1 wherein edging end blades at either end of said laterally spaced array of said saw blades are chipping heads coupled by gearing means to said saw arbor for optimal rotational speed, in chipping planes parallel to said saw blades, of chipping blades on said chipping heads so as to bring said chipping blades into chip cutting engagement with said workpiece translating generally longitudinally into said sawbox for curve sawing and edging.

15. The saw of claim 14 wherein said sawbox further comprises chipping anvils corresponding to, and cooperating with said chipping heads, said chipping anvils mounted in close adjacency to arcs of rotation of said chipping blades in said chipping planes, so as to lie at least partially in said chipping planes to provide a bearing and shearing surface against which said workpiece may bear so as to shear chips from said workpiece as said chipping blades engage said workpiece in said chip cutting engagement.

16. The saw of claim 15 wherein said chipping anvils are rigid members having generally planar bearing surfaces extending generally horizontally, parallel to said saw arbor, and said chipping blades, as they rotate in said arcs of rotation, form an acute angle relative to said planar bearing surfaces as said chipping blades are rotated past said chipping anvils.

17. The gang saw of claim 16 wherein said gearing means are reduction gears for reducing said rotational speed of said chipping heads relative to a rate of rotation of said saw blades so as to optimize cutting of said chips from said workpiece.

18. The saw of claim 1 wherein edging end blades at either end of said array of saw blades are chipping heads for chipping edges of said workpiece when said workpiece is translated generally longitudinally into said sawbox for curve sawing and edging.

19. The saw of claim 18 wherein said sawbox further comprises chipping anvils corresponding to, and cooperating with said chipping heads, said chipping anvils mounted in close adjacency to arcs of rotation of chipping blades, mounted on said chipping heads, in said chipping planes, so as to lie at least partially in said chipping planes to provide a bearing and shearing surface against which said workpiece may bear so as to shear chips from said workpiece as said chipping blades engage said workpiece in chip cutting engagement.

20. The saw of claim 19 wherein said chipping anvils are rigid members having generally planar bearing surfaces extending generally horizontally, parallel to said saw arbor, and said chipping blades, as they rotate in said arcs of rotation, form an acute angle relative to said planar bearing surfaces as said chipping blades are rotate past said chipping anvils.

5

21. In a selectively adjustable edging and curve-sawing saw having a sawbox rotatably supporting, on a selectively rotatable generally horizontal saw arbor selectively rotatable about a generally laterally extending horizontal axis of rotation, a plurality of generally vertically and longitudinally aligned saw blades in parallel selectively adjustable laterally spaced array, a method for selectively adjustable edging and curve sawing comprising the steps of:

10

(a) skewing a selectively skewable sawbox in a generally horizontal plane about a vertical axis of rotation relative to an infeed path and positioning said sawbox in said infeed path so as to receive a workpiece translated generally longitudinally along said infeed path and into said sawbox,

15

(b) adjusting saw blade spacing within said laterally spaced array by saw blade array spacing selective adjustment means mounted to said sawbox for selective adjustment of lateral spacing between said saw blades in said parallel selectively adjustable lateral spaced array along said saw arbor, and

20

(c) laterally translating, by saw translating means, said laterally spaced array relative to said sawbox according to an optimized profile.

Abstract of the Disclosure

The selectively adjustable edging and curve-sawing saw of the present invention has a selectively skewable sawbox, skewable in a generally horizontal plane about a vertical axis of rotation relative to an infeed path and positionable in the infeed path so as to receive workpieces translated generally longitudinally along the infeed path and into the sawbox. The sawbox rotatably supports a saw arbor. A plurality of generally vertically and longitudinally aligned saw blades are slidingly mounted on the saw arbor in a parallel selectively adjustable laterally spaced array. A saw blade array spacing selective adjustment device is mounted to the sawbox. The array is slidingly translated relative to the sawbox according to an optimized profile.

FIG. 1




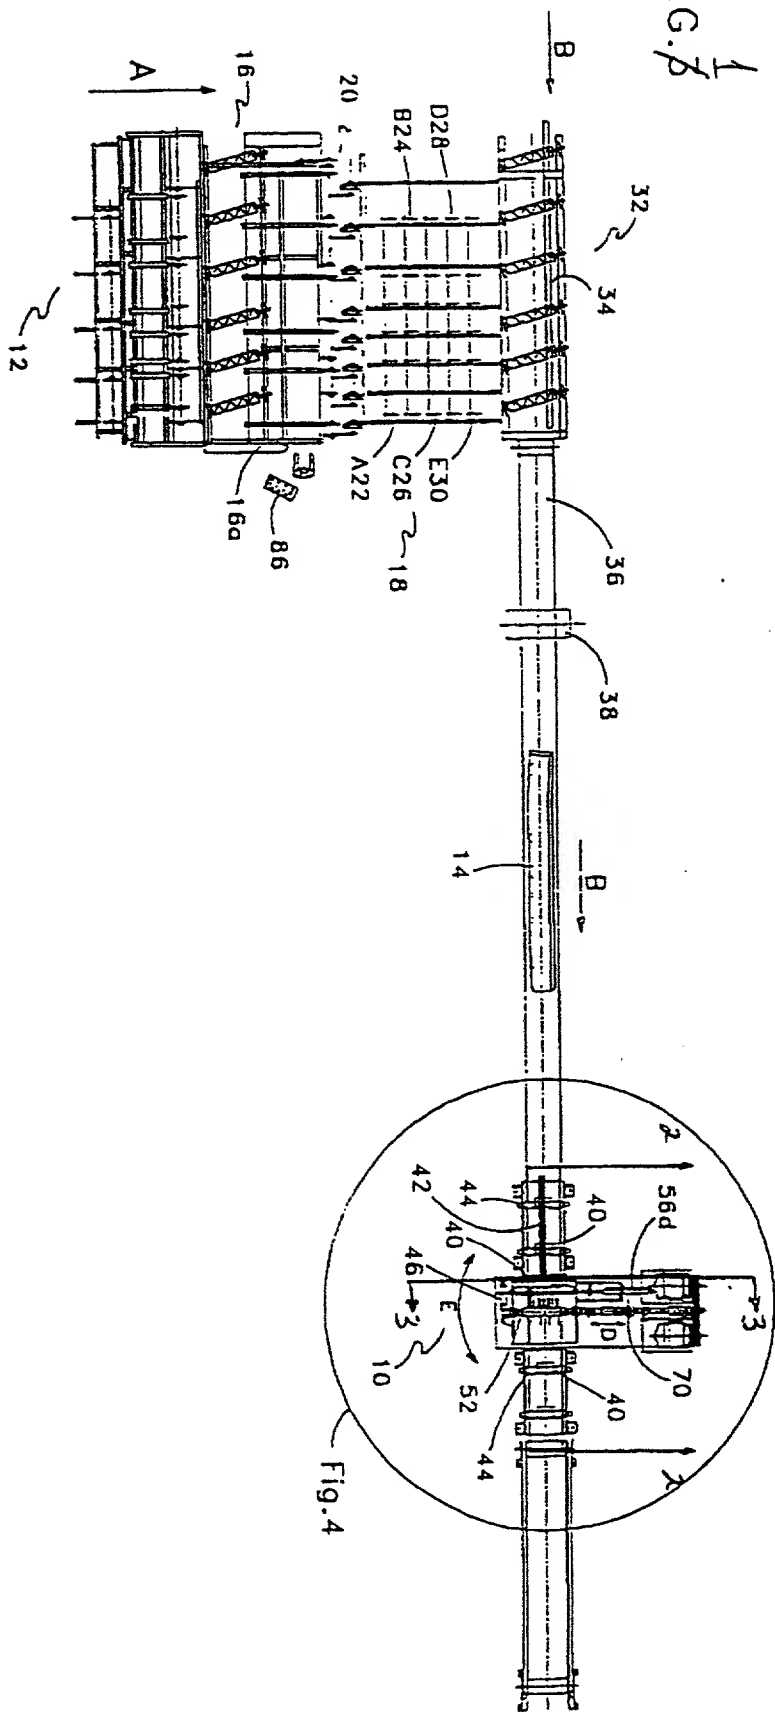



FIG. 2

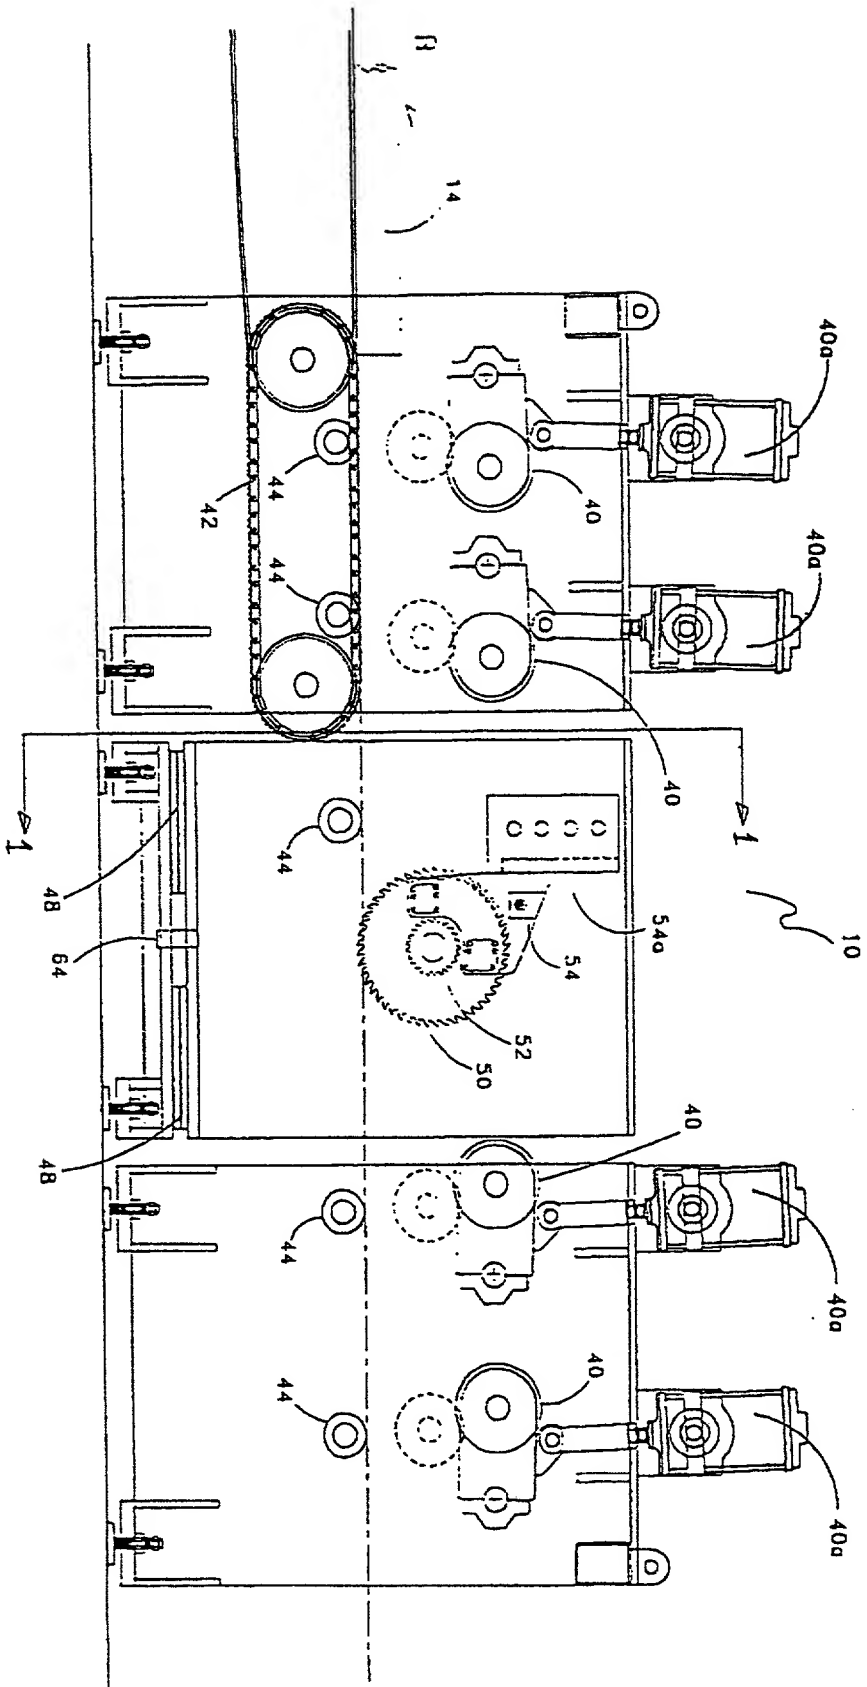

10



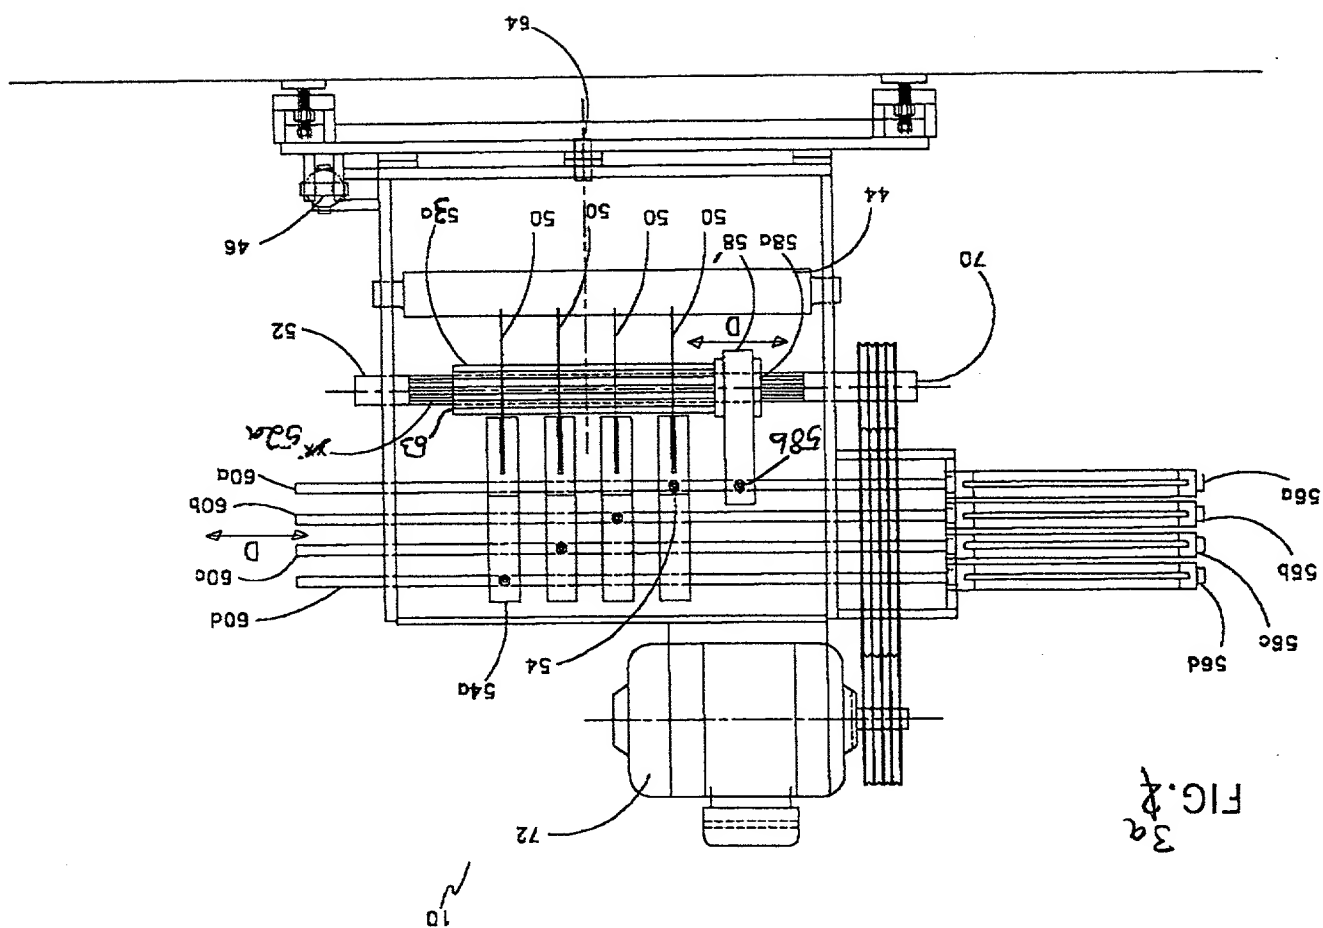

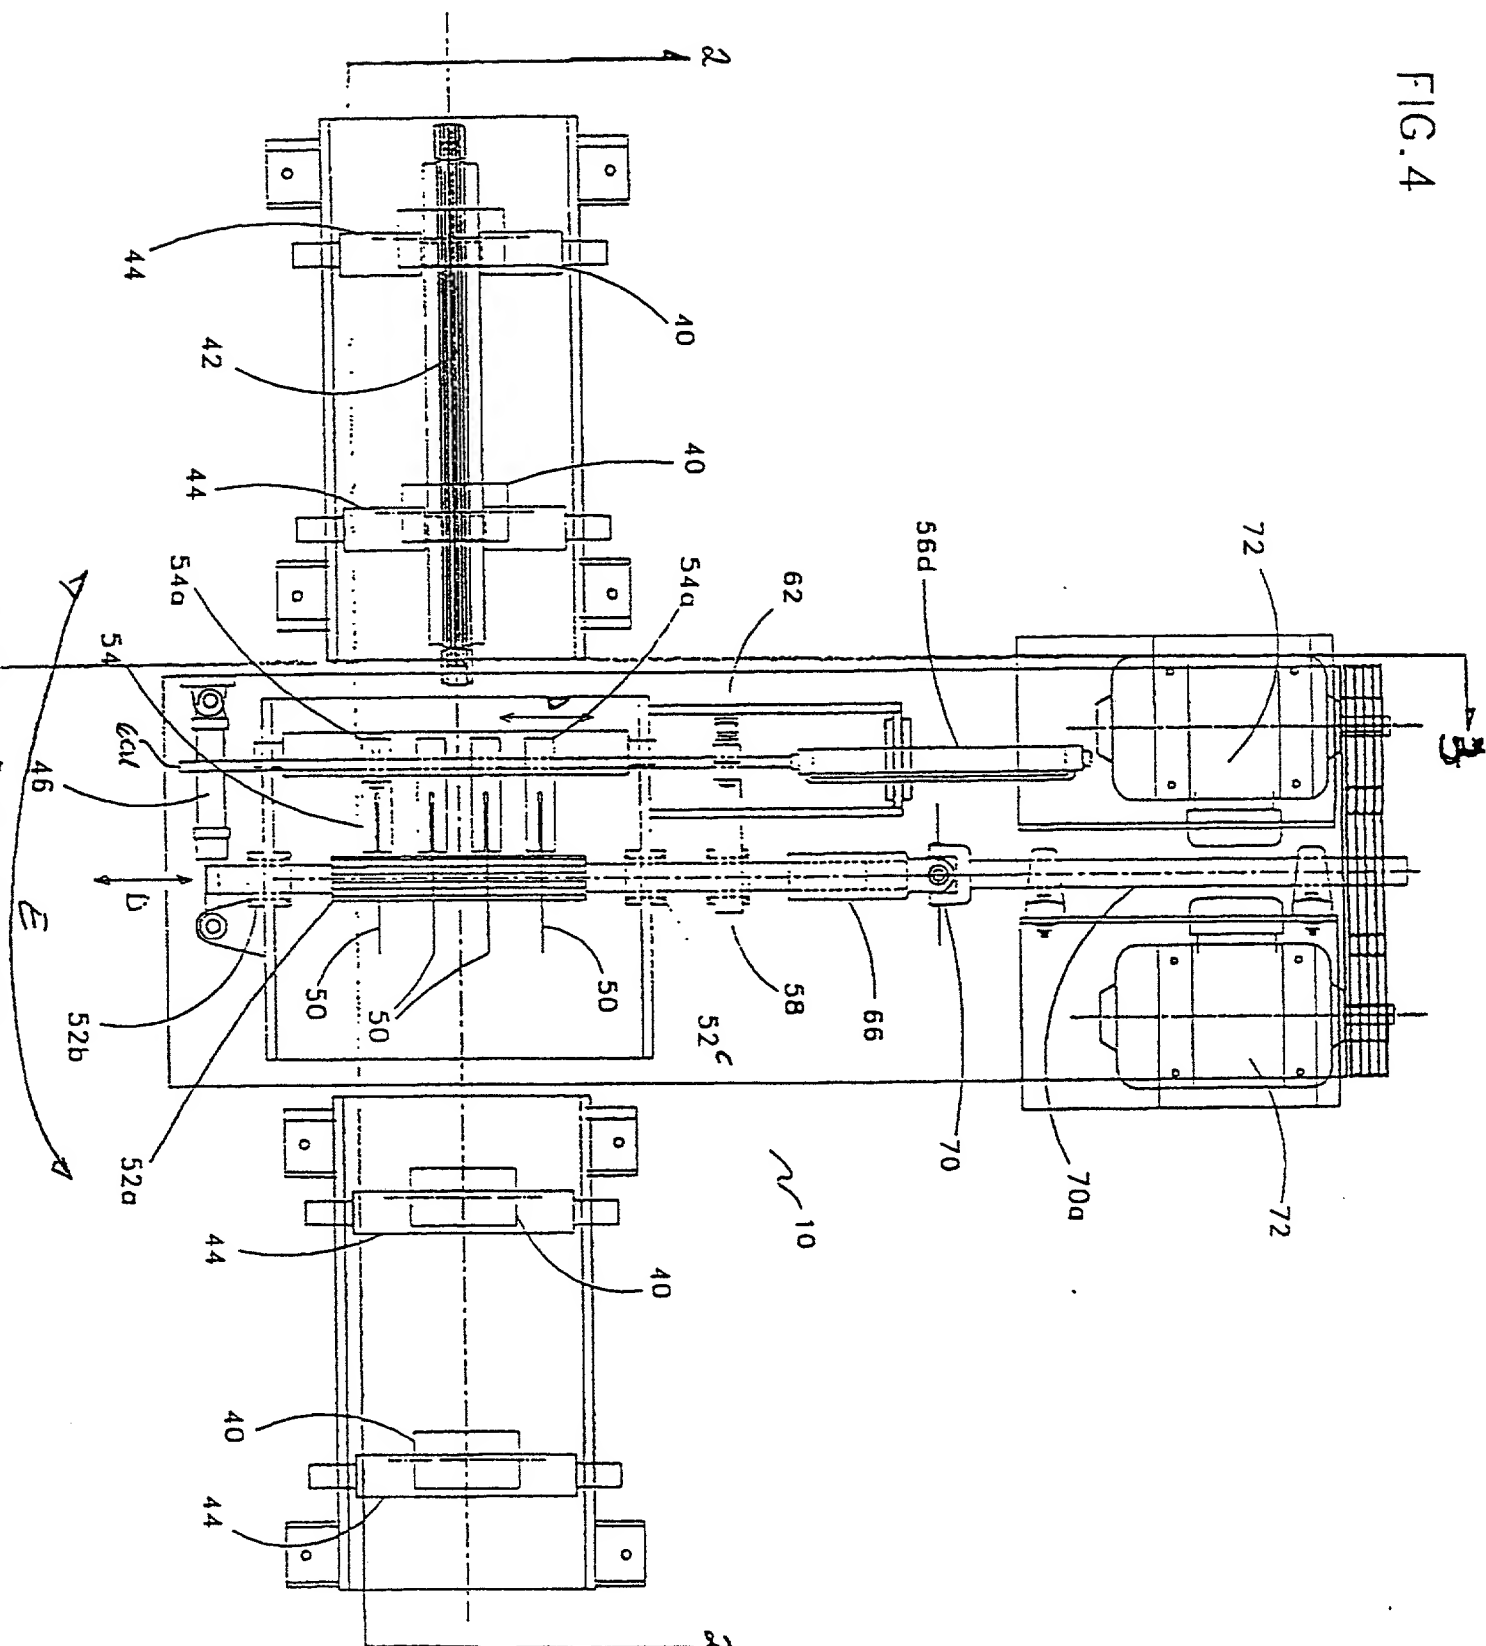[illegible]

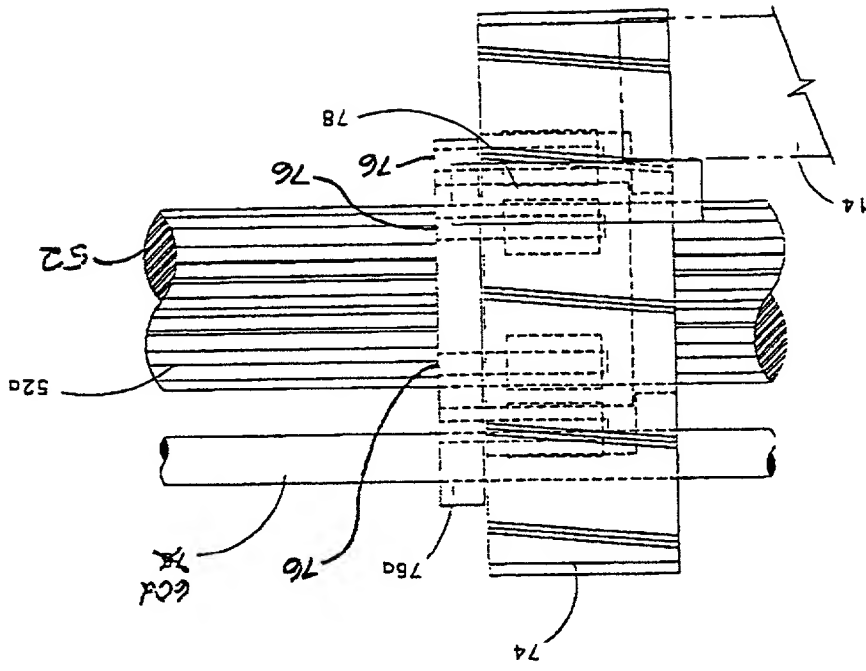


FIG. 5a

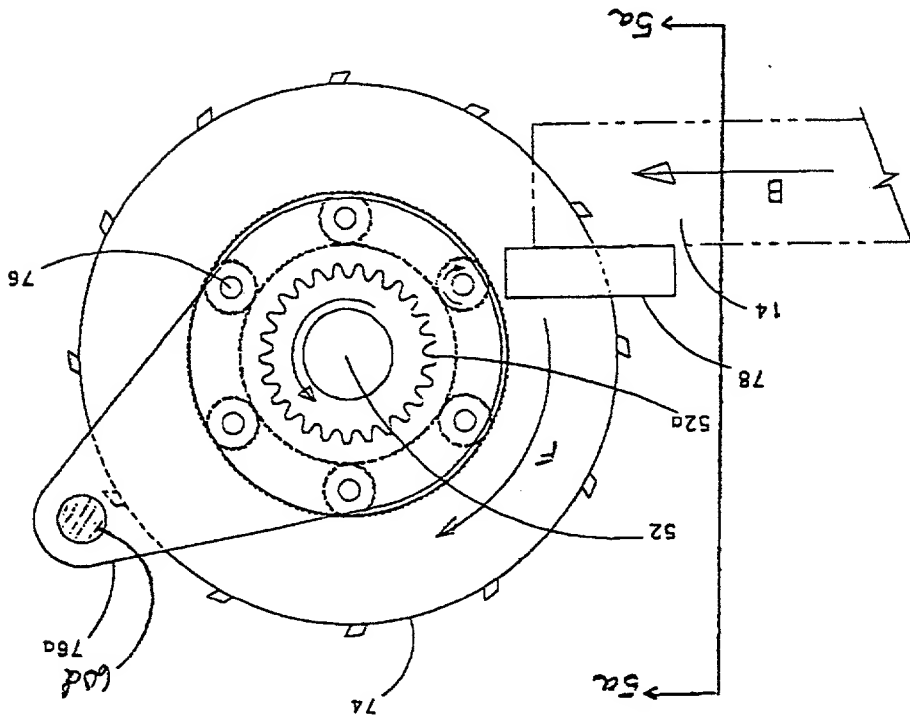


FIG. 5

EM057274925Attorney Docket No. TF/7508**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am a joint inventor of the invention entitled:

**METHOD AND APPARATUS FOR CURVE SAWING OR
TRAVERSE EDGING WITH AN ACTIVE SAWBOX**

which is described and claimed in:

 x the attached specification; or,
 the specification in application Serial No. , filed ; and
as amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)Priority Claimed

<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Date of Filing)	<u> </u> Yes	<u> </u> No
<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Date of Filing)	<u> </u> Yes	<u> </u> No

I claim the benefit, under 35 U.S.C. §120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Pending United States application
Serial No. 60/019,756, filed September 9, 1996.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

NAME

Registration No.

ANTONY C. EDWARDS

40,288

Direct all telephone calls to Antony C. Edwards at (250) 861-4022, facsimile (250) 862-3937. Address all correspondence to Suite 206, 347 Leon Avenue, Kelowna, British Columbia, Canada V1Y 8C7.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole
or first Inventor:

Steven W. Michell

Inventor's signature:

Steve Michell

Date:

Sept. 4/97

Residence Address:

Salmon Arm, British Columbia, Canada

Citizenship:

Canadian

Post Office Address:

P.O. Box 8
3550 - 45th Street, S.E.
Salmon Arm, British Columbia, Canada
V1E 4N2

466060" 01262680

Full name of second Inventor: Emeric Johnson

Inventor's signature _____

Date:

Residence Address: Salmon Arm, British Columbia, Canada

Citizenship: Canadian

Post Office Address: P.O. Box 8
3550 - 45th Street, S.E.
Salmon Arm, British Columbia, Canada
V1E 4N2

Full name of third Inventor: Brian Stroud

Inventor's signature:

Date:

Residence Address: Salmon Arm, British Columbia, Canada

Citizenship: Canadian

Post Office Address: P.O. Box 8
3550 - 45th Street, S.E.
Salmon Arm, British Columbia, Canada
V1E 4N2


1. 2000-2001 2. 2001-2002 3. 2002-2003 4. 2003-2004 5. 2004-2005 6. 2005-2006 7. 2006-2007 8. 2007-2008 9. 2008-2009 10. 2009-2010 11. 2010-2011 12. 2011-2012 13. 2012-2013 14. 2013-2014 15. 2014-2015 16. 2015-2016 17. 2016-2017 18. 2017-2018 19. 2018-2019 20. 2019-2020 21. 2020-2021 22. 2021-2022 23. 2022-2023 24. 2023-2024 25. 2024-2025 26. 2025-2026 27. 2026-2027 28. 2027-2028 29. 2028-2029 30. 2029-2030 31. 2030-2031 32. 2031-2032 33. 2032-2033 34. 2033-2034 35. 2034-2035 36. 2035-2036 37. 2036-2037 38. 2037-2038 39. 2038-2039 40. 2039-2040 41. 2040-2041 42. 2041-2042 43. 2042-2043 44. 2043-2044 45. 2044-2045 46. 2045-2046 47. 2046-2047 48. 2047-2048 49. 2048-2049 50. 2049-2050 51. 2050-2051 52. 2051-2052 53. 2052-2053 54. 2053-2054 55. 2054-2055 56. 2055-2056 57. 2056-2057 58. 2057-2058 59. 2058-2059 60. 2059-2060 61. 2060-2061 62. 2061-2062 63. 2062-2063 64. 2063-2064 65. 2064-2065 66. 2065-2066 67. 2066-2067 68. 2067-2068 69. 2068-2069 70. 2069-2070 71. 2070-2071 72. 2071-2072 73. 2072-2073 74. 2073-2074 75. 2074-2075 76. 2075-2076 77. 2076-2077 78. 2077-2078 79. 2078-2079 80. 2079-2080 81. 2080-2081 82. 2081-2082 83. 2082-2083 84. 2083-2084 85. 2084-2085 86. 2085-2086 87. 2086-2087 88. 2087-2088 89. 2088-2089 90. 2089-2090 91. 2090-2091 92. 2091-2092 93. 2092-2093 94. 2093-2094 95. 2094-2095 96. 2095-2096 97. 2096-2097 98. 2097-2098 99. 2098-2099 100. 2099-2100 101. 2100-2101 102. 2101-2102 103. 2102-2103 104. 2103-2104 105. 2104-2105 106. 2105-2106 107. 2106-2107 108. 2107-2108 109. 2108-2109 110. 2109-2110 111. 2110-2111 112. 2111-2112 113. 2112-2113 114. 2113-2114 115. 2114-2115 116. 2115-2116 117. 2116-2117 118. 2117-2118 119. 2118-2119 120. 2119-2120 121. 2120-2121 122. 2121-2122 123. 2122-2123 124. 2123-2124 125. 2124-2125 126. 2125-2126 127. 2126-2127 128. 2127-2128 129. 2128-2129 130. 2129-2130 131. 2130-2131 132. 2131-2132 133. 2132-2133 134. 2133-2134 135. 2134-2135 136. 2135-2136 137. 2136-2137 138. 2137-2138 139. 2138-2139 140. 2139-2140 141. 2140-2141 142. 2141-2142 143. 2142-2143 144. 2143-2144 145. 2144-2145 146. 2145-2146 147. 2146-2147 148. 2147-2148 149. 2148-2149 150. 2149-2150 151. 2150-2151 152. 2151-2152 153. 2152-2153 154. 2153-2154 155. 2154-2155 156. 2155-2156 157. 2156-2157 158. 2157-2158 159. 2158-2159 160. 2159-2160 161. 2160-2161 162. 2161-2162 163. 2162-2163 164. 2163-2164 165. 2164-2165 166. 2165-2166 167. 2166-2167 168. 2167-2168 169. 2168-2169 170. 2169-2170 171. 2170-2171 172. 2171-2172 173. 2172-2173 174. 2173-2174 175. 2174-2175 176. 2175-2176 177. 2176-2177 178. 2177-2178 179. 2178-2179 180. 2179-2180 181. 2180-2181 182. 2181-2182 183. 2182-2183 184. 2183-2184 185. 2184-2185 186. 2185-2186 187. 2186-2187 188. 2187-2188 189. 2188-2189 190. 2189-2190 191. 2190-2191 192. 2191-2192 193. 2192-2193 194. 2193-2194 195. 2194-2195 196. 2195-2196 197. 2196-2197 198. 2197-2198 199. 2198-2199 200. 2199-2200 201. 2200-2201 202. 2201-2202 203. 2202-2203 204. 2203-2204 205. 2204-2205 206. 2205-2206 207. 2206-2207 208. 2207-2208 209. 2208-2209 210. 2209-2210 211. 2210-2211 212. 2211-2212 213. 2212-2213 214. 2213-2214 215. 2214-2215 216. 2215-2216 217. 2216-2217 218. 2217-2218 219. 2218-2219 220. 2219-2220 221.	
--	--

Full name of fourth Inventor:

James Jackson

Inventor's signature:

Date:


Sept 4, 1997

Residence Address:

Salmon Arm, British Columbia, Canada

Citizenship:

Canadian

Post Office Address:

P.O. Box 8
3550 - 45th Street, S.E.
Salmon Arm, British Columbia, Canada
V1E 4N2

Full name of fifth Inventor:

John Sergeant

Inventor's signature:

Date:


SEP 4/97.

Residence Address:

Salmon Arm, British Columbia, Canada

Citizenship:

Canadian

Post Office Address:

P.O. Box 8
3550 - 45th Street, S.E.
Salmon Arm, British Columbia, Canada
V1E 4N2

466060" 08262600

EM057274925Designation of Domestic Representative

Wells, St. John, Roberts, Gregory & Matkin P.S.
 601 West First Avenue, Suite 1300
 Spokane, Washington
 U.S.A. 99201-3817

are hereby designated applicants' representatives upon whom notices or process in proceedings may be served affecting the application filed herewith entitled **Method and Apparatus for Curve Sawing or Traverse Edging with an Active Sawbox** by **Steven W. Michell et al.**

Associate Power of Attorney

Applicants' attorney hereby appoints the following

<u>Name</u>	<u>Registration No.</u>
Richard J. St. John	19,363
David P. Roberts	23,032
Randy A. Gregory	30,386
James L. Price	27,376
Mark S. Matkin	32,268
Deepak Malhotra	33,560
Mark W. Hendricksen	32,356
David G. Latwesen	38,533
George G. Grigel	31,166
Keith D. Grzelak	37,144
John S. Reid	36,369
Lance R. Sadler	38,605
James S. Shaurette	39,833


all of **Wells, St. John, Roberts, Gregory & Matkin P.S.**, 601 West First Avenue, Suite 1300, Spokane, Washington, U.S.A. 99201-3817 his associate attorneys to prosecute this application to issue, to transact all business in the Patent and Trademark Office in connection therewith, and to receive the letters patent.

Please address all correspondence respecting this application to:

Wells, St. John, Roberts, Gregory & Matkin P.S.
 601 West First Avenue, Suite 1300
 Spokane, Washington
 U.S.A. 99201-3817

Please direct all telephone calls respecting this application to **John S. Reid** at telephone number (509) 624-4276.

Date: 8 Sep 1997

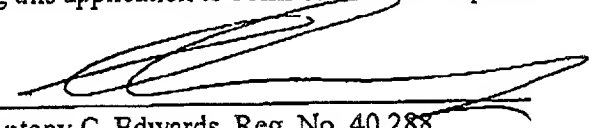
 Antony C. Edwards, Reg. No. 40,288
 Attorney for the Applicant

156060" 0E262680